

DRAFT GEAR KPA-81 ^{NEW}







ABSORPTIONS APPARATEN KPA-81

1. Das leichteste Ganzstahl-Getriebe.
2. Niedriger Preis durch die Anwendung von nur zwei Hauptfedern.
- 3*. Hohe Kapazität aufgrund der erhöhten Höhe der Federn.
- 4*. Hohe Lebensdauer durch die Vergrößerung von Arbeitsflächen des Reibknotens.
- 5*. Hohe Betriebssicherheit durch die Anwendung von Schiebepplatten des U-Profiles mit hohem Widerstand im Querschnitt.
- 6*. Neuer hochfester Gehäuseaufbau.
7. Austauschbar mit Standard (AAR Rule 21) -Zahnrädern.
8. Kann in rauen Umgebungen verwendet werden und erfordert keine zusätzliche Wartung.

DRAFT GEAR KPA-81

1. The lightest All-steel draft gear.
2. Low cost, thanks to usage of two main springs only.
- 3*. High capacity due to increased height of springs.
- 4*. Excellent durability, due to enlarged space of working surfaces of friction clutch.
- 5*. High reliability thru the application of U-shaped profile of movable plates, with high fracture resistance.
- 6*. New high-strength construction of housing.
7. Interchangeable with standard (AAR Rule 21) draft gears. with AAR Rule21.
8. Can be used in harsh environments and requires no additional maintenance.

*patent

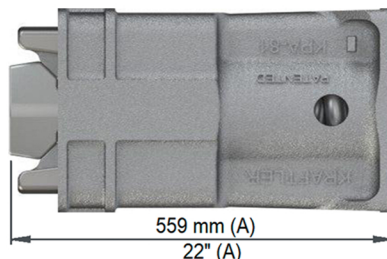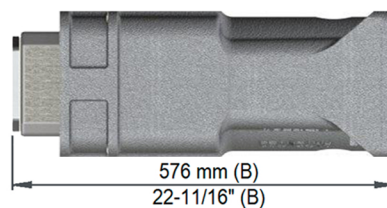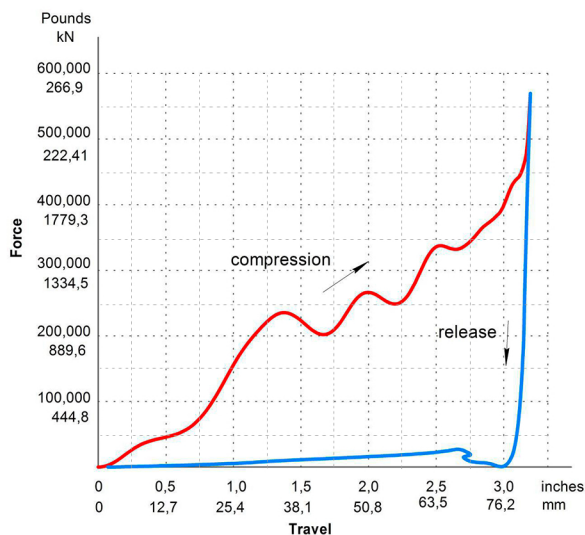

Offizielle wertung hub	82 mm	3.19 inches	Official rating travel
Offizielle wertung kapazität	63 kJ	46.200 foot pounds	Official rating capacity
Gewicht	142 kg	313 pounds	Weight
Pre verkürzte für standard 24-5/8'' tasche	A=559 mm	A=22 inches	Preshortened for standard 24-5/8'' pocket
Auf freie höhe assembled	B=576 mm	B=22-11/16 inches	Assembled to free height